


# EXHAUST FANS WITH DIRECT DRIVE

The DDE Series



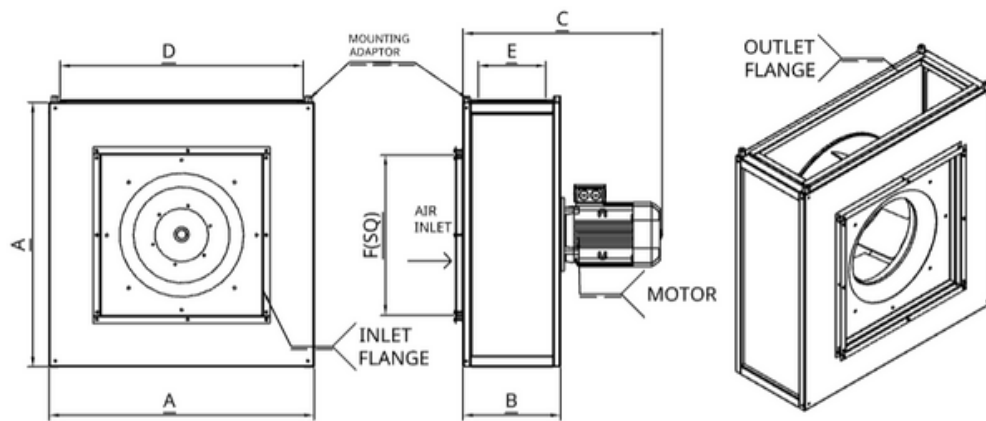

# DDE SERIES


This series has numerous options for suitable air flow and static pressure, (1000-20000 cmh and 200-1250 pa), no maintenance thanks to direct drive, easy to install in ceiling suspended and floor mounted position, economic solution.

MODEL	Minimum Airflow in CMH	Maximum Airflow in CMH	Minimum Static Pressure in Pa	Minimum Static Pressure in Pa	Motor			Dimension in mm					
					Pole	Kw	Ph / Voltage	A	B	C	Outlet D X E		Inlet F (SQ)
250-055-2P	1042	2165	200	600	2	1.1	3/415 ± 10%	510	181	396	363	62	300
280-110-2P	2538	3234	200	600	2	1.1	3/415 ± 10%	550	201	457	403	82	330
315-150-2P	4035	4801	200	600	2	1.5	3/415 ± 10%	550	223	479	403	102	380
355-220-2P	5446	6417	200	600	2	2.2	3/415 ± 10%	620	250	548	483	139	400
400-370-2P	9534	9927	200	400	2	3.7	3/415 ± 10%	700	287	625	553	166	450
400-550-2P	9124	9534	400	600	2	5.5	3/415 ± 10%	700	287	625	553	166	450
450-750-2P	13634	14831	200	600	2	7.5	3/415 ± 10%	780	288	694	633	170	475
450-110-4P	3010	6219	200	600	4	1.1	3/415 ± 10%	780	288	694	633	170	475
500-220-4P	2466	9097	200	800	4	2.2	3/415 ± 10%	870	320	657	723	199	540
560-370-4P	7649	13175	200	800	4	3.7	3/415 ± 10%	965	356	694	820	234	575
630-550-4P	5056	19502	200	1250	4	5.5	3/415 ± 10%	1,075	397	802	930	275	660

## FEATURES

- Motor placed outside airflow
- 4 way air outlet
- Easy to hang or floor mount
- Opens on 3 sides for easy cleaning
- Strong powder-coated body
- Suitable for outdoor use
- Efficient backward curved blowers with IP55 motor

Flow Pressure Chart

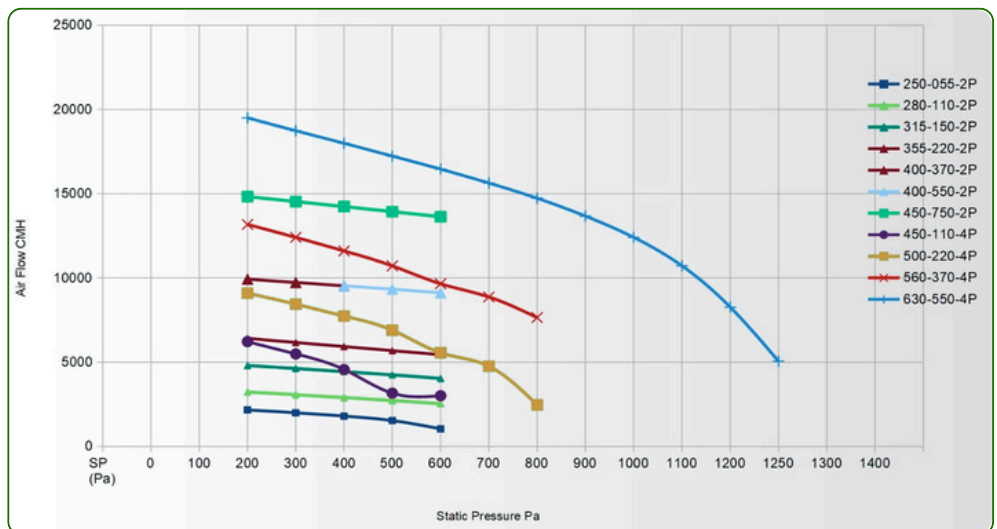

Disclaimer: The information in this technical literature is presented as a general information and no representation or warranty is expressly or impliedly given as to its completeness or correctness of any product or suitability of the product for the user. While enough care is taken by the Company to ensure that information in the literature is up to date and accurate, the user must verify all the details and specifications, of the product from the Company prior to concluding any decision for buying any product. In no event shall the Company, their directors, employees and agents be liable to the user for any or all damages, losses and causes of action, errors, injury, whether direct, indirect, consequential or incidental, suffered or incurred by any person/s or due to any use and/or inability to use this literature or information.



**Greenfieldxp Technologies Pvt Ltd**

Office: R-493, TTC Industrial Area, MIDC, Rabale, Thane Belapur Road, Navi Mumbai - 400701

Email: [sales@greenfieldxp.com](mailto:sales@greenfieldxp.com)

Web: [www.greenfieldxp.com](http://www.greenfieldxp.com)